
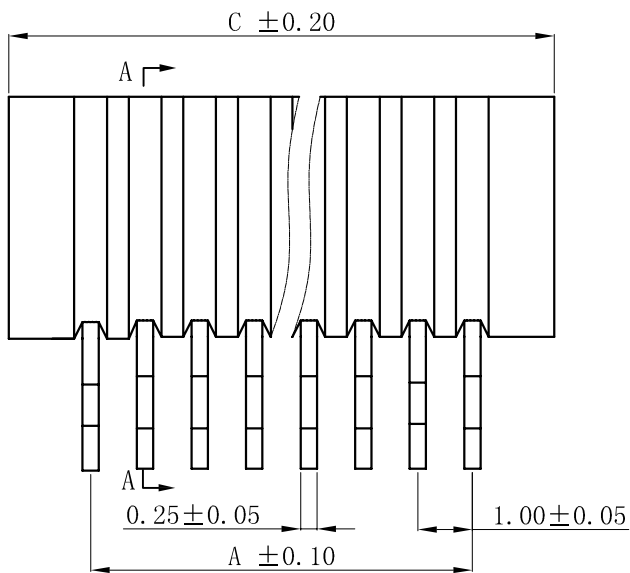
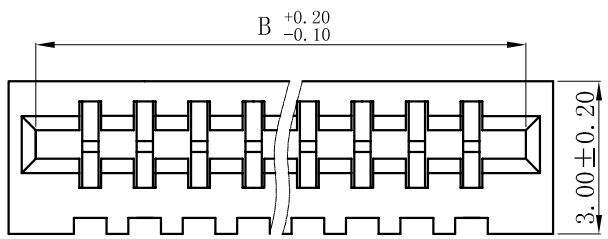
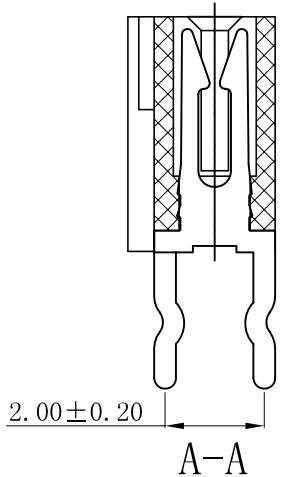


PCB Layout

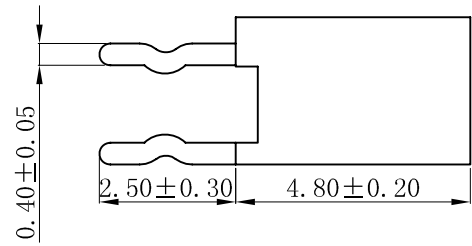


性能:
额定电流: 0.5A
额定电压: 50V
耐电压: 500V
接触电阻: 30mΩ
绝缘电阻: 500MΩ
工作温度: -20℃~+85℃

塑件(材质): PA46, UL94V-0
插簧(材质): 磷青铜, 镀锡

REV	DESCRIPTION	MARK
X1	first edition	

孔位	A	B	C
4	3.00	5.15	6.20
5	4.00	6.15	7.20
6	5.00	7.15	8.20
7	6.00	8.15	9.20
8	7.00	9.15	10.20
9	8.00	10.15	11.20
10	9.00	11.15	12.20
11	10.00	12.15	13.20
12	11.00	13.15	14.20
13	12.00	14.15	15.20
14	13.00	15.15	16.20
15	14.00	16.15	17.20
16	15.00	17.15	18.20
17	16.00	18.15	19.20
18	17.00	19.15	20.20
19	18.00	20.15	21.20
20	19.00	21.15	22.20
21	20.00	22.15	23.20
22	21.00	23.15	24.20
23	22.00	24.15	25.20
24	23.00	25.15	26.20
25	24.00	26.15	27.20
26	25.00	27.15	28.20
27	26.00	28.15	29.20
28	27.00	29.15	30.20
29	28.00	30.15	31.20
30	29.00	31.15	32.20
31	30.00	32.15	33.20
32	31.00	33.15	34.20

东莞市创亿科技有限公司 DONGGUAN CYCONN TECHNOLOGY CO.,LTD				PART NO. : 1.0-4-nP		
X. ±	X. ±	MAT'L /	APPD:	CUS PART NO. :		
.X ± 0.20	.X ± 0.1°					
.XX ± 0.10	.XX ± 0.05°	FINISH /	CHKD:	DATE 2008.06.21		VERSION VI.0
.XXX ±	.XXX ±					
	UNITS: mm	Q' TY /	DR:	SCALE 1:1	SHEET 1/1	REV. X1