

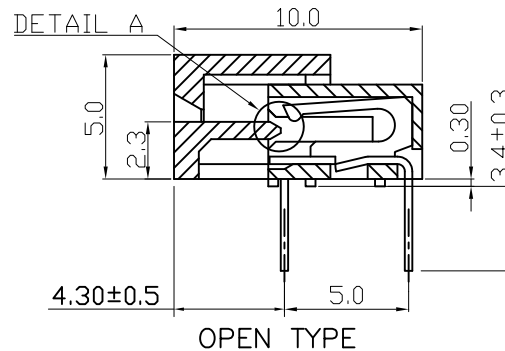
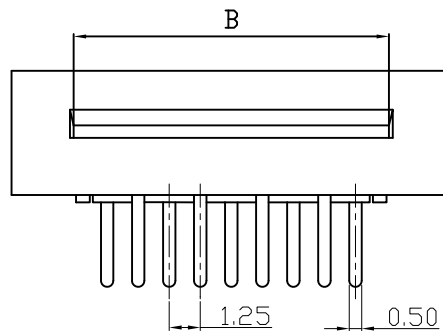
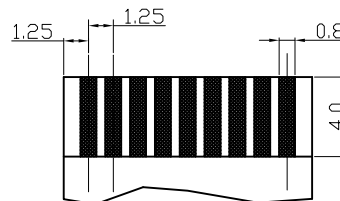


NOTES


- 1.MATERIALS:
HOUSING-PBT UL 94V-0,
TERMINAL-PHOSPHOR BRONZE.
- 2.ORDER INFORMATION:

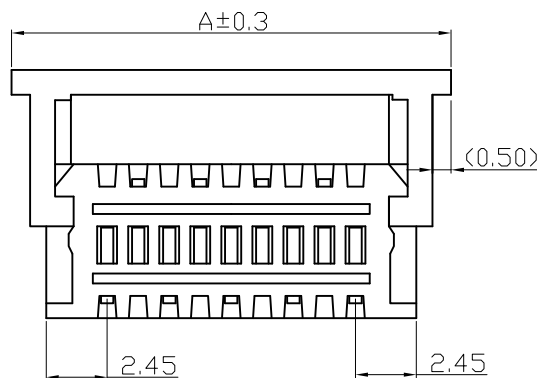

FFC/FPC DIMENSION
THICKNESS 0.3±0.05mm

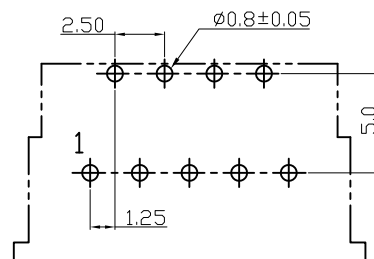

正针 PCB 寸法
Positive needle PCB layout

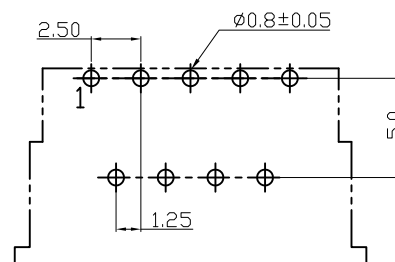

反针 PCB 寸法
Versa needle PCB layout

PIN	A	B
3	9.55	5.20
4	10.80	6.45
5	12.05	7.70
6	13.30	8.95
7	14.55	10.20
8	15.80	11.45
9	17.05	12.70
10	18.30	13.95
11	19.55	15.20
12	20.80	16.45
13	22.05	17.70
14	23.30	18.95
15	24.55	20.20
16	25.80	21.45
17	27.05	22.70
18	28.30	23.95
19	29.55	25.20
20	30.80	26.45
21	32.05	27.70
22	33.30	28.95
23	34.55	30.20
24	35.80	31.45
25	37.05	32.70
26	38.30	33.95
27	39.55	35.20
28	40.80	36.45
29	42.05	37.70
30	43.30	38.95
31	44.55	40.20
32	45.80	41.45

东莞市创亿科技有限公司
DONGGUAN CYCONN TECHNOLOGY CO., LTD

General Tolerances:
Angle: $\pm 3^\circ$
Dim: 0.0 ± 0.30
0.00 ± 0.25
0.000 ± 0.15

Date: Sheet 1 of 1

A	RELEASE
REV	Revision Record Date
	Appr'd by

Drawn by	Chk'd by
Appr'd by	Scale 3 : 1

1.25-3-nPW